



- (51) International Patent Classification:
B01J 20/04 (2006.01) *C02F 1/28* (2006.01)
- (21) International Application Number:
PCT/IB2019/054632
- (22) International Filing Date:
04 June 2019 (04.06.2019)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
15/996,907 04 June 2018 (04.06.2018) US
- (71) Applicant: **LHOIST NORTH AMERICA, INC.**
[US/US]; P.O. Box 985004, Fort Worth, Texas 76185-5004 (US).
- (72) Inventors: **KUCERAK, Lacey N.**; 2236 Ryan Ridge, Grapevine, Texas 76051 (US). **KRAMADHATI, Nara-**

hari N.; 9351 Russel Street, La Habra, California 90631 (US).


(74) Agent: **GUNTER, Charles D.**; Whitaker Chalk Swindle & Schwartz PLLC, 301 Commerce Street, Suite 3500, Fort Worth, TX 76102-4186 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH,

(54) Title: COMPOSITION AND METHOD FOR SIMULTANEOUS WATER SOFTENING AND SILICA REMOVAL IN FEED WATER

Figure 1

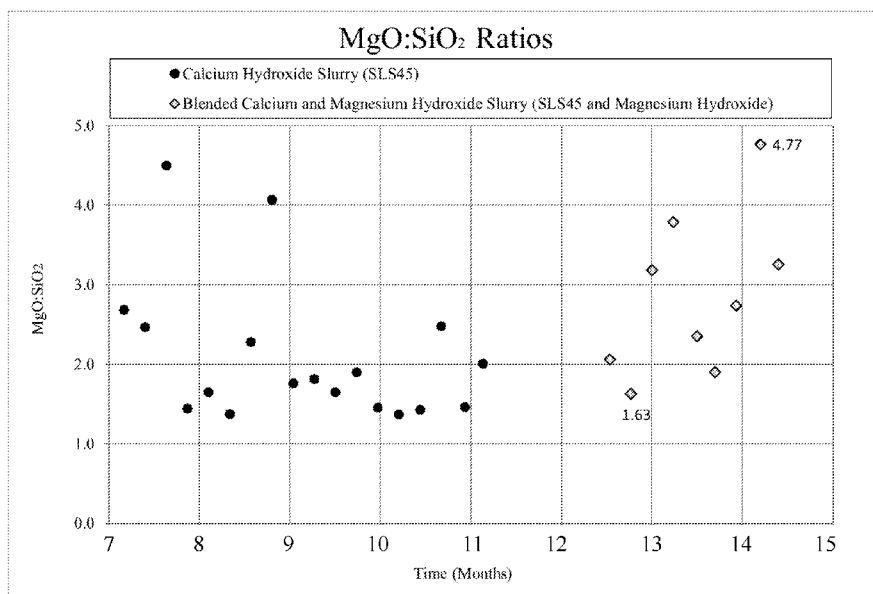

(57) Abstract: A slurry product is shown for treating water to both soften the water and to remove silica. The slurry is prepared by blending, in an aqueous medium, hydrated lime under the form of a slurry or of a powder with at least partly hydrated dolime, or magnesium hydroxide or magnesium oxide particles or a combination thereof under the form of a slurry or of a powder, to form an aqueous slurry where the amounts of the dolime, magnesium hydroxide or magnesium oxide particles or the combination thereof are provided such that the solid content of the slurry is up to 60 % by weight of the slurry. The slurry also maintains a stable and pumpable viscosity for over a month.

WO 2019/234624 A1

GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

COMPOSITION AND METHOD FOR SIMULTANEOUS WATER SOFTENING AND SILICA REMOVAL IN FEED WATER

BACKGROUND OF THE INVENTION

1. Field of the Invention:

The present invention relates generally to high performance, stable slurries comprised of Ca and Mg sourced from calcined lime and notably dolomite and particularly in the use of such slurries for water softening and silica removal in water treatment.

2. Description of the Prior Art:

Plants operating with water often require specific conditions in term of water hardness and mineral impurities.

Impurities in boiler feed water can cause severe operational problems. Careful consideration must be given to the quality of the water used for generating steam. Boiler feed water composition should not exceed the tolerance limits of the particular boiler design (function of pressure, heat transfer rate, etc.). If the feed water does not meet these requirements, it must be treated to remove impurities. Common feed water contaminants that can form boiler scale include calcium, magnesium, and silica. To prevent precipitation of calcium and magnesium salts in boiler feed water systems and in low-pressure boilers, softening by lime with or without soda ash is commonly employed as a first treatment step. This may be coupled with ion exchange and reverse osmosis (RO) if ultrapure water is required in e.g., high pressure boiler systems.

Silica scale formation on internal surfaces of heat-exchanging equipment is a serious threat to high pressure steam systems. Silica combines with many elements to produce silicates.

Silicates form tenacious deposits in boiler tubing that have insulating properties and can cause tube failures. Typical polyphosphate and phosphonate antiscalants are ineffective against silica deposition. Silica deposits can often only be removed by fluoridic acids resulting in chemical and handling costs, system downtime and hazardous waste generation. This is a particular concern in thermoelectric generating plants as demand for reducing water footprint has prompted a shift from once-through to recirculating systems with the consequence of rapid concentration of contaminants. In addition, silica can vaporize into the steam at operating pressures as low as 30 bars and carried over to turbines where precipitation on the blades can result in reduced efficiency and an imbalance of the turbine wheels. Although nanofiltration (NF) and reverse osmosis (RO) are proven technologies for dissolved solids removal, they remain susceptible to silica fouling. Therefore, if silica enters boiler feed water, the usual corrective action is to increase boiler blowdown for reduction of silica concentration to acceptable levels followed by correcting the cause of contamination.

A common procedure for SiO_2 removal from boiler feed water is based on softening with lime $[\text{Ca}(\text{OH})_2]$ with or without soda ash $[\text{Na}_2\text{CO}_3]$. Lime softening utilizes the addition of calcium hydroxide to remove calcium and magnesium ions by precipitation. Silica is removed by co-precipitation in calcium and magnesium hydroxide flocs. The precipitates can be sent to a clarifier or filter where the separated silica can be disposed.

Solar plants require treated water containing minimal levels of impurities for cooling towers and to clean solar panel mirrors. A solar plant treats high flow of ground water and recirculated water from the plant's processes that require treatment to reduce hardness, silica, and other contaminants. Some solar plants use calcium hydroxide slurry for treating water for hardness removal and pH adjustment. Magnesium sulfate is further used to precipitate silica.

It has been known for many years that silica removal during soda-lime softening can be enhanced in the presence of dissolved magnesium through chemical interactions. Silica is adsorbed onto magnesium hydroxide and precipitated at an elevated pH. However, naturally occurring magnesium content in raw waters is variable and often insufficient, therefore, additional dosing of magnesium compounds is required. The addition of soluble magnesium salts (e.g., MgSO_4 , MgCl_2) is often not desirable due to an increase of total dissolved solids. Therefore MgO or $\text{Mg}(\text{OH})_2$ can be used. Temperature and pH have important effects on silica removal by precipitation. The precipitation mechanism occurs faster and more completely at high temperatures (greater than 55°C). The pH must be high enough to cause magnesium to precipitate but not so high as to make the precipitant resoluble. Furthermore, for a chemical system to be considered as efficient for scale control, the following requirements must be met:

- _ Minimum number and volume of chemical agents to be inventoried and handled, and preferably a single storage stable product;
- Rapid process to match intake of make-up water;
- Production of easily settleable or filterable flocs;
- Able to be installed in-line with a small spatial footprint and energy demand;
- pH compatible with other components and processes or discharge regulations.

The object of the present invention is to provide a single product for simultaneous control of hardness and silica in feed water meeting the abovementioned requirements.

SUMMARY OF THE INVENTION

In one aspect, the invention allows achievement of water treatment targets using one single product that has a stable and pumpable viscosity over a period of one month of storage. In another aspect, the invention allows reducing significant amounts of magnesium sulfate in processes of silica removal. It contains magnesium hydroxide, or at least a precursor of it as magnesium oxide, which targets silica removal, and calcium hydroxide, which rapidly increases pH and promotes water softening. The invention thus improves technical performance, eliminates handling of multiple products or replaces partially the use of some products, and reduces overall treatment costs.

In addition, the slurry product of the invention provides odor control, as the readily available calcium hydroxide quickly neutralizes the source and the magnesium hydroxide provides continuous treatment. Lastly, the product is a source of alkalinity, as both the calcium and magnesium source provides alkalinity for water treatment.

The product under the form of a slurry of the invention is particularly useful in removing silica from water such as boiler feed water used in industrial processes. The slurry product of the invention is made up of hydrated lime particles and particles of at least partially hydrated dolime particles or magnesium hydroxide particles or magnesium oxide particles or a combination thereof. By the term "at least partially hydrated dolime" is meant a partially hydrated dolime or a fully hydrated dolime. By the term "partially hydrated dolime" is meant a calcium magnesium compound comprising calcium in majority or totally under the hydrated form $\text{Ca}(\text{OH})_2$ and magnesium under the form MgO and optionally under hydrated form $\text{Mg}(\text{OH})_2$. By the term "fully hydrated dolime" is meant a calcium magnesium compound comprising calcium and magnesium under their hydrated form $\text{Ca}(\text{OH})_2$ and $\text{Mg}(\text{OH})_2$ respectively, the resulting form MgO being marginal. The resulting slurry has a solid content up

to about 60%, greater or equal to 25%, preferably greater or equal to 30%, more preferably greater or equal to 40%, in particular lower than or equal to 60%, preferably less than about 50% by weight of the slurry.

In another embodiment, the product under the form of a slurry of the invention is particularly useful in removing silica from water such as ground water used for solar plants, for cooling towers and/or to clean solar panel mirrors.

In a preferred embodiment, the slurry also maintains a stable and pumpable viscosity of less than about 1,000 mPa·s (i.e. 1,000 cPs) measured with a Brookfield viscometer, RV #3 spindle, 100 RPM even up to in excess of one month.

In the slurry product according to the invention, the percentage of calcium to magnesium expressed as a percentage of calcium hydroxide to magnesium hydroxide is preferably in a range from 66-99% Ca(OH)₂ to 1-44% Mg(OH)₂ by dry weight. In the slurry product according to the invention, the hydrated lime has an available lime content of at least 80%, preferably at least 85%, more preferably at least 90% by weight of the hydrated lime measured according to the ASTM C25 or the EN 459-2:2010 standard. The preferred hydrated lime particles have a d₉₀ of 8 to 145 μm, more preferably 8 to 54 μm, most preferably 8 to 23 μm. The hydrated lime particles have a d₅₀ of 2 to 17 μm, more preferably 2 to 7 μm, most preferably 2 to 3.5 μm

In the slurry product according to the invention, the at least partially hydrated dolime or magnesium hydroxide or magnesium oxide particles or the combination thereof has a d₉₀ comprised between 10 and 100 μm, in particular about 40 and 55 μm and a d₅₀ between 2 and 10 μm, in particular about 3 and 5 μm. Advantageously, the slurry product prepared according to the teaching of the invention has a viscosity below about 1000 mPa·s, preferably below about 600 mPa·s, more preferably below about 400 mPa·s.

The slurry product of the invention can optionally contain a conventional dispersant, such as a polycarboxylate, a polyacrylate and/or a polyphosphonate type dispersant in an amount comprised between about 0.5 and 5 wt%, in particular between 0.5% and 3%, more particularly between 0.5% and 2% of the hydrated lime. Other conventional type additives can also be present, such as, for example, an additive selected from among sugars, such as sucrose, or preferably sorbitol, and present in an amount of up to 2 wt%, and/or an additive selected from among anti-scaling agents up to 2 wt%, and/or other dispersants.

In the process for preparing a slurry product of the invention, (1) a hydrated lime is blended with (2) a dolime, at least partially hydrated, or magnesium hydroxide or magnesium oxide particles or a combination thereof, wherein at least one of hydrated lime or dolime, at least partially hydrated, or magnesium hydroxide or magnesium oxide particles or a combination thereof is under the form of an aqueous slurry and wherein the amounts of hydrated lime and at least one of the dolime, at least partially hydrated, or magnesium hydroxide or magnesium oxide particles or the combination thereof are provided in an amount to constitute as a solids content of the slurry, up to about 60% and greater or equal to 25% by weight of the slurry, preferably up to about 30 %, more preferably greater or equal to 40% by weight of the slurry product, more preferably between 30 and 40% by weight of the slurry.

The preferred hydrated lime will have a BET specific surface area below about 25 m²/g, preferably below about 10 m²/g, in particular below or equal to 8 m²/g.

The present invention can be further described as hereinafter.

In a first aspect, the present invention is related to a slurry for removing silica from water, the slurry comprising:

- hydrated lime particles;

- magnesium containing particles, the magnesium containing particles being selected from among the group consisting of at least partially hydrated dolime particles, magnesium hydroxide particles and magnesium oxide particles or a combination thereof;
- a source of water to form a slurry;

and characterized in that

the slurry has a solid content in the range from about 25% to about 60%, preferably up to about 50 % by weight of the slurry product, more preferably between 30 and 40% by weight in the slurry.

In a second embodiment of the invention, the slurry maintains a stable and pumpable viscosity of < 1,000 mPa·s for up to one month or more.

In another embodiment of the slurry according to the invention, optionally in combination with the second embodiment mentioned above, the percentage of calcium to magnesium expressed as a percentage of calcium hydroxide to magnesium hydroxide in the combined slurry is in a range from 66-99% Ca(OH)₂ to 1-44% Mg(OH)₂ by dry weight.

In another embodiment of the slurry according to the invention, optionally in combination with the one or more of the embodiments mentioned above, the hydrated lime has an available lime content of at least 80% in weight of the hydrated lime measured according to the ASTM C25 or EN 459-2:2010.

In another embodiment of the slurry according to the invention, optionally in combination with the one or more of the embodiments mentioned above, the hydrated lime particles have a d₉₀ of 5 to 150 μm, preferably of 8 to 145 μm.

In another embodiment of the slurry according to the invention, optionally in combination with the one or more of the embodiments mentioned above, the hydrated lime particles have a d_{50} of 2 to 20 μm , preferably of 2 to 17 μm .

In another embodiment of the slurry according to the invention, optionally in combination with the one or more of the embodiments mentioned above, the dolime, at least partially hydrated, or magnesium hydroxide or magnesium oxide particles or the combination thereof has a d_{90} comprised between 10 and 100 μm , preferably between 40 and 55 μm .

In another embodiment of the slurry according to the invention, optionally in combination with the one or more of the embodiments mentioned above, the dolime, at least partially hydrated, or magnesium hydroxide or magnesium oxide particles or a combination thereof has a d_{50} between 2 to 10 μm , preferably between 3 and 3.5 μm .

In another embodiment of the slurry according to the invention, optionally in combination with the one or more of the embodiments mentioned above, the slurry has a viscosity below about 1000 mPa·s.

In another embodiment of the slurry according to the invention, optionally in combination with the one or more of the embodiments mentioned above, the slurry further comprises a dispersant notably of polycarboxylate type in an amount comprised between 0.5 and 5 wt%, preferably up to 3 wt% based upon the total weight of the hydrated lime.

In another embodiment of the slurry according to the invention, optionally in combination with the one or more of the embodiments mentioned above, the slurry further comprises an additive selected from the group consisting of sugars present in an amount of up to 2 wt% in weight of the hydrated lime, an anti-scaling agent up to 2 wt%, and/or an additional dispersant compound.

According to a second aspect, the present invention is related to a process for manufacturing a slurry useful for removing silica from water, the process comprising the steps of:

blending, in an aqueous medium, (1) hydrated lime under the form of an aqueous slurry or of a powder with (2) at least partly hydrated dolime or magnesium hydroxide or magnesium oxide particles or a combination thereof, under the form of an aqueous slurry or of a powder, and wherein the amounts of dolime, or magnesium hydroxide or magnesium oxide particles or the combination thereof are provided such as the solid content of the slurry is up to 60% by weight of the slurry.

In a second embodiment of the process according to the invention, the at least partially hydrated dolime, or magnesium hydroxide or magnesium oxide particles or a combination thereof are provided in amounts such that the percentage of calcium hydroxide to magnesium hydroxide is in a range comprised from about 66-99% Ca(OH)_2 to 1-44% Mg(OH)_2 by dry weight.

In another embodiment of the process according to the invention, optionally in combination with the second embodiment of the process mentioned above, the hydrated lime has an available lime content of at least 80%, measured according to the standard ASTM C25 or EN 459-2:2010.

In another embodiment of the process according to the invention, optionally in combination with one or more of the embodiments of processes mentioned above, the said hydrated lime particles have a BET specific surface area below about 25 m^2/g , in particular below about 10 m^2/g .

In another embodiment of the process according to the invention, optionally in combination with one or more of the embodiments of processes mentioned above, the hydrated lime particles have a d_{90} of 5 to 150 μm , preferably of 8 to 145 μm .

In another embodiment of the process according to the invention, optionally in combination with one or more of the embodiments of processes mentioned above, the hydrated lime particles have a d_{50} of 2 to 20 μm , preferably of 2 to 17 μm .

In another embodiment of the process according to the invention, optionally in combination with one or more of the embodiments of processes mentioned above, the at least partly hydrated dolime, or magnesium hydroxide or magnesium oxide particles or a combination thereof has a d_{90} comprised between 10 and 100 μm , preferably between 40 and 55 μm .

In another embodiment of the process according to the invention, optionally in combination with one or more of the embodiments of processes mentioned above, the at least partly hydrated dolime, or magnesium hydroxide or magnesium oxide particles or a combination thereof has a d_{50} comprised between 2 to 10 μm , preferably between 3 and 3.5 μm .

In another embodiment of the process according to the invention, optionally in combination with one or more of the embodiments of processes mentioned above, the process includes a step of adding a dispersant notably of polycarboxylate type in an amount comprised between 0.5 and 5 wt% of the hydrated lime.

In another embodiment of the process according to the invention, optionally in combination with one or more of the embodiments of processes mentioned above, the process further comprises the step of adding an additive selected from the group consisting of sugars, such as

sucrose, an anti-scaling agent and an additional dispersant compound added in an amount of up to 2 wt%.

Additional objects, features and advantages will be apparent in the written description which follows.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a graph showing the $\text{MgO}:\text{SiO}_2$ ratio before and during a trial treatment of boiler feed water using the compositions of the invention.

Figure 2 is a graph of silica concentrations in the boiler feed water as a function of time when using calcium hydroxide slurry for water treatment and when using a blended calcium and magnesium hydroxide slurry according to the principles of the invention. In the graph, tC indicates the time of change for water source/quality.

Figure 3 is a graph of silica concentrations at a clarifier outlet of a solar plant as function of time when using calcium hydroxide slurry with high amounts of magnesium sulfate for water treatment, and when using a blended calcium and magnesium hydroxide slurry according to the invention with reduced amounts of magnesium sulfate.

Figure 4 is a graph of the pH of treated water at a clarifier outlet of a solar plant as function of time when using calcium hydroxide slurry with high amounts of magnesium sulfate for water treatment, and when using a blended calcium and magnesium hydroxide slurry according to the invention with reduced amounts of magnesium sulfate.

DETAILED DESCRIPTION OF THE INVENTION

The present invention provides a solution to the previously described problems of water treatment and, particularly, treatment of industrial boiler feed water or ground water used at solar plants. The compositions of the invention take the form of a slurry product containing calcium hydroxide and magnesium hydroxide, or at least a precursor of it as magnesium oxide and having a solid content of up to about 60 wt.% (most preferably 30-40%). Calcined dolomite, magnesium hydroxide or magnesium oxide provides the $Mg(OH)_2$ source for the combined slurry. Calcined limestone provides the source of calcium hydroxide.

Calcium oxide, CaO , is often referred to as "quicklime", while calcium hydroxide, $Ca(OH)_2$, is referred to as "hydrated lime", both sometimes being informally referred to as "lime". Quicklime is usually in the form of lumps or pebbles but it can also be a powder. Dry hydrated lime is usually a powder. In the meaning of the present invention, "powder" means a solid substantially made of particles lower than 2 mm, in particular lower than 1 mm or even lower than 500 μm and notably greater than 0.1 μm , in particular 0.5 μm .

According to present industry practices, in order to further process these compounds and improve the ease with which they are handled, dry CaO or dry $Ca(OH)_2$ is often mixed with water to form an aqueous suspension, i.e., a slurry, sometimes called milk of lime. This fluid suspension of slaked lime, also referred to as hydrated lime (calcium hydroxide— $Ca(OH)_2$), can include impurities, in particular silica, and magnesium oxide to the extent of a few percent. Such a suspension is obtained either by slaking quicklime (calcium oxide— CaO) with a large excess of water, or by mixing hydrated lime with water.

The resulting aqueous suspensions are often characterized by the concentration of the mass of the solid matter (% solids), the chemical reactivity of the slurry, and the distribution of the sizes

of the particles in suspension (controlling in part viscosity). These characteristics determine, in part, the properties of the slurry, mainly its viscosity and its reactivity.

The reactivity of an aqueous calcium magnesium suspension is determined by the dissolution rates of the particles. It may be measured by injecting a small amount of the suspension in a large volume of demineralized water. This measurement, based on the recording of the time-dependent change in the conductivity of the resulting liquid phase, was developed for monitoring reactivity of lime milks intended for softening of drinking waters (v. Van Eckeren et al. *Improved Milk-of-Lime For Softening of Drinking Water: the Answer to the Carry-Over Problem*, In Aqua, 1994, 43 (1), p. 1-10). More details on the procedure for measuring this reactivity of lime milks are available in §6.11. Determination of solubility index by conductivity of the standard EN 12485: 2010. The reactivity of an aqueous calcium magnesium suspension is also determining for any neutralization or precipitation operation.

In the present discussion, the distribution of particle sizes will be understood to mean the distribution as measured by means of a laser granulometer and the distribution is characterized in terms of, for example, the d_{90} interpolated value of the particle size distribution curve, the dimension d_{90} corresponding to the dimension for which 90% of the particles are less than the said dimension.

As used in the discussion which follows, the following terms will be understood by those skilled in the relevant industries to have the following meanings:

- **Limestone** (calcium carbonate - CaCO_3 with impurities) is present in large quantities in natural rock around the world.
- **Quicklime** (calcium oxide – CaO with impurities) is an alkali and the result of the chemical transformation of limestone by heating it typically above 900°C , which requires energy

(typically 3.2 GJ/tCaO). Given its rapid reaction with water, calcium oxide, also called burnt lime, is often referred to as quick lime.

- **Hydrated lime** or **Slaked lime** [calcium (di-)hydroxide - $\text{Ca}(\text{OH})_2$ with impurities] is a strong alkali formed when calcium oxide reacts with water. This reaction generates heat. Depending on the amount of water used, calcium hydroxide can either be a dry hydrate (dry powder), a paste (putty lime) or a liquid milk of lime also called lime slurry (dry suspension in water).
- **High Calcium Hydrate** or **Hydrated calcium lime** or “hical”- hydrated lime containing mainly calcium hydroxide thus containing a low amount of magnesium compound as impurity, i.e. when expressing magnesium as MgO, having less than 5% MgO typically a MgO content lower than 3%, in particular lower than 2 % in weight ..
- **Dolomite** (double carbonate of calcium and magnesium - $\text{CaCO}_3 \cdot \text{MgCO}_3$) is the result of a partial or full dolomitization of calcium carbonate.
- **Dolime** or **dolomitic lime** (calcium & magnesium oxide - $\text{CaO} \cdot \text{MgO}$) is the result of the chemical transformation of double carbonate of calcium and magnesium by heating it typically above 900°C, which requires energy (typically 2.935 GJ/t $\text{CaO} \cdot \text{MgO}$). Like quicklime, dolime reacts with water. CaO's affinity for water is higher than that of MgO.
- **Hydrated dolime** (calcium & magnesium (tetra-)hydroxide - $\text{Ca}(\text{OH})_2 \cdot \text{Mg}(\text{OH})_2$) represents the completion of the hydration reaction carried out in pressurized reactors at temperatures of around 150°C.

The lime slurries preferred for purposes of the present invention are fine milk of lime slurries with high solids content and relatively low viscosity so as to be easily pumpable. Those skilled in the relevant arts will appreciate that it is sometimes difficult to achieve the desired balance between viscosity, solids content and reactivity in the resulting lime slurries. Variables that generally affect the quality of slaked lime are disclosed in J.A.H. Oates - "*Lime and Limestone*" (pages 229-248) as well as in Boynton - "*Chemistry and Technology of Lime and Limestone*" (pages 328-337).

Some of the known commercial technologies for producing lime slurries having high solids contents include the following:

For example, it is known to increase the solids content of the milk of lime by adding a dispersing agent, in the presence of a small quantity of an alkaline metal hydroxide (U. S. Patent No.'s 5,616,283, 4,849,128, and 4,610,801). This method of preparation makes it possible to achieve concentrations of dry matter greater than 40 wt% based on the total weight of the milk of lime, with a viscosity less than 1200 mPa·s.

It is also known to increase the solids content in the suspension, while limiting the increase in viscosity, by incorporating hydrated lime having a coarser particle size or by slaking quicklime under conditions favorable to the growth of the grains; for example, by limiting the increase in temperature during slaking and by adding additives such as sulfates etc. (U. S. Patent No. 4,464,353).

One high solids content calcium hydroxide slurry useful for purposes of the present invention can be prepared according to the teachings of U.S. Patent No. 8,206,680, issued June 26, 2012, to *Diaz Chavez, et al.* and assigned to the assignee of the present invention. That reference describes a calcium magnesium aqueous suspension having particles of solid matter with (before being put into suspension) a specific surface area, calculated according to the BET nitrogen absorption method, which is less than or equal to 10 m²/g. Such an aqueous suspension of calcium magnesium solid matter can achieve a very low viscosity, making it possible to greatly increase the solid matter concentration of the suspension, or again to reduce the size of the particles in suspension, thus obtaining a concentrated and reactive milk of lime.

In the discussion which follows, the term “BET” nitrogen absorption method will be understood to mean the determination of the specific surface area of the slaked lime as measured by nitrogen adsorption manometry and calculated according to the BET method, after degassing *in vacuum* at 190°C for at least 2 hours.

Preferably, the particles of solid matter of the high solids content calcium hydroxide slurry have a specific surface area according to the BET method of less than or equal to 25 m²/g, preferably less than or equal to 10 m²/g. The suspensions thus prepared advantageously have a dynamic viscosity less than or equal to 1000 mPa·s, preferably less than or equal to 600 mPa·s. Under these conditions it is possible to obtain a suspension having solid matter contents greater than 25 wt%, and advantageously at or greater than 40 wt%, and/or d₉₈ granulometric dimensions of less than 20 microns, preferably equal to or less than 5 microns.

One “hical” lime slurry products that can be used for manufacturing the slurry product of the invention is a 45 wt% solids slurry, with a viscosity of less than 600 mPa·s and a particle size distribution with a d₅₀ value of 2.5-3.5 μm and d₉₈ value of less than 90 μm.

As mentioned, the slurry product of the invention has a source of calcium as one component and a source of magnesium as a second component. Particularly preferred sources of the calcium for the slurries of the invention are from calcium hydroxide such as a hical slurry, as described, or from products as described in the previously cited U.S. Patent No. 8,206,680 B2. As also mentioned, the preferred calcium hydroxide slurries have an average particle size distribution d₉₀ of 8-145 μm; a d₅₀ of 2-17 μm; and an available lime as measured by the ASTM C25 or EN 459-2:2010 standard of greater than or equal to about 80%.

The slurry of the invention typically comprises up to 44 wt% $\text{Mg}(\text{OH})_2$ as the second component of the slurry formulation. The $\text{Mg}(\text{OH})_2$ can conveniently be sourced from dolomitic hydrate or magnesium hydroxide or magnesium oxide. One preferred source of magnesium for the magnesium hydroxide slurries can be from dolomitic hydrate which has an average particle size distribution d_{90} of about 40-55 μm ; a d_{50} size distribution from about 3.0 to 5 microns. The source of magnesium can also be from any commercially available magnesium hydroxide or magnesium oxide.

The slurries of the invention can also contain other conventional additives, such as an optional dispersing agent. The dispersing agent can be one of those previously described, including the use of a conventional polycarboxylate or polyacrylate and/or polyphosphonate dispersant in an amount comprised between about 0.5 and 5.0 wt% of the hydrated lime. Other conventional additives may also be present such as an additive selected from the group consisting of sugars, such as sucrose, or preferably sorbitol, and present in an amount of up to 2 wt%; and/or an additive selected from the group consisting of anti-scaling agents present up to about 2 wt%, and/or other dispersants, all weights being based upon the weight of hydrated lime used.

The water used to suspend the hydroxides can be used from multiple sources; however, softened water or low hardness tap water (total hardness of < 100 ppm) is preferred to maintain the product's reactivity and effectiveness.

The manufacturing process of the slurry product is created by blending in an aqueous medium a hydrated lime product with an at least partially hydrated dolime product or magnesium oxide or magnesium hydroxide or a combination thereof in predetermined ratios (optionally with a dispersant or other additive of the type described) and wherein

- the hydrated lime product is under the form of a slurry or a powder and

- the at least partially hydrated dolime product or magnesium oxide or magnesium hydroxide or a combination thereof is under the form of a slurry or a powder.

In an embodiment of the process of the invention, a hical (standard hydrate at 1-2% moisture) calcium hydroxide slurry or a slurry according to patent US8206680 B2 is blended with a dolomitic hydrate (fully hydrated dolime) or magnesium hydroxide slurry;

In another embodiment of the process of the invention, a hical calcium hydroxide under the form of powder is blended with a dolomitic hydroxide or magnesium hydroxide under the form of a powder in presence of water;

In another embodiment of the process of the invention, a hical calcium hydroxide slurry or an aqueous suspension as described in U.S. Patent No. 8,206,680B2 is blended with a dolomitic hydroxide or magnesium hydroxide under the form of powder.

In another embodiment of the invention, a hical calcium hydroxide under the form of a powder is blended with a dolomitic hydroxide slurry or magnesium hydroxide slurry.

The ratio of Ca(OH)_2 to Mg(OH)_2 employed in the slurries of the invention varies depending upon raw water chemistry. For example, a low silica concentration removal (20 ppm) was found to be effective using a dry ratio of approximately 9:2 calcium hydroxide to dolomitic hydrate [92% Ca(OH)_2 to 8.0% Mg(OH)_2] or high silica concentration removal (100 ppm) a dry ratio of approximately 3:10 calcium hydroxide to dolomitic hydrate [66.2% Ca(OH)_2 to 33.8% Mg(OH)_2] was found to be effective.

The slurries of the invention are also characterized as having a stable viscosity over 30 days of < 1,000 mPa·s measured using a Brookfield viscometer with an RV #3 spindle at 100 RPM, thereby remaining pumpable. The slurries are easily resuspendable without hard packing.

Example of the Practice of the Invention:

An oil refinery was using lime softening for boiler feed water preparation from a blend of ground water and municipal tap water. The average quality composition of the feed water is 175 mg/dm³ total hardness and 13.5 mg/dm³ SiO₂. Target concentrations for hardness and silica after lime softening are < 50 mg/dm³ and < 1.5 mg/dm³, respectively. The water quality composition fluctuates in terms of total hardness and ratio MgO:SiO₂ (1:1 to 5:1). For the lower ratio of 1:1 to 3:1, silica levels in the boiler feed water increased from < 0.5 mg/dm³ to 2.1 mg/dm³, exceeding the target concentration of < 1.5 mg/dm³. This was attributed to two factors: (1) the low MgO:SiO₂ ratio (1:1 to 3:1) in the raw water is insufficient to remove silica through precipitation of a magnesium hydroxide silicate compound, and (2) the lower total hardness of the raw water (120 mg/dm³) results in reduced co-precipitation of silica. The MgO:SiO₂ ratio needed at this site, taking into account the incoming and target silica concentrations, was calculated at ≥ 3:1.

The solution proposed for this plant was to change the dosing reagent from a solely calcium-based product to the slurry product of the invention with a solid content typically greater than 40 wt%. The blend was optimized based on operating parameters and treatment targets for softening and silica removal at this refinery. A Ca(OH)₂ to Mg(OH)₂ ratio of 92:8 was engineered to provide sufficient magnesium content for removal of silica to the required < 1.5 mg/dm³ in the boiler feed water while providing simultaneous softening. Silica concentrations in the boiler feed water immediately and significantly decreased. A reduction from 2.1 mg/dm³ silica to less than 0.6 mg/dm³ silica was measured after two days from the start of dosing of the new composition. Silica continued to decrease as the slurry took full effect in the system and the

boiler feed water returned consistent silica concentrations of 0.2 to 0.5 mg/dm³ in the months that followed. In addition, the ratio of hydroxide consumed per hardness removed decreased by 11%, indicating further optimization of the softening process with the new composition.

Figure 1 of the drawings is a graph showing the MgO:SiO₂ ratio before and during a trial treatment of boiler feed water using the compositions of the invention. The data on the left of the graph represents the historical data and the data on the right of the graph represents the data taken during the trial. The required ratio of MgO:SiO₂ is typically optimized between about 1-5.

Figure 2 of the drawings is a graph of silica concentrations in the boiler feed water in function of the time when using calcium hydroxide slurry for water treatment and when using a blended calcium and magnesium hydroxide slurry according to the principles of the invention. It will be observed that the source of water changed after at a certain time (T_c), thus necessitating a change in the water treatment protocol at the plant. The triangle data points represent a slurry of calcium hydroxide alone. The circle data points represent a treatment with a slurry of the invention containing a combined calcium hydroxide slurry and magnesium hydroxide.

In summary, after the raw water change it was found that supplemental magnesium was necessary to reach the silica concentration targets in the boiler feed water. Once switching to the new composition of the invention as described herein, the silica targets were easily met due to the fine particle size ($d_{50} \leq 2.5 \mu\text{m}$) and high reactivity of the engineered calcium hydroxide slurry paired with the fine dolomitic hydrate. This stable viscosity engineered slurry promoted quick and efficient hardness removal and silica precipitation. The refinery was able to avoid any additional treatment/chemicals and their associated equipment costs to achieve the necessary final water quality. The solution is flexible and the chemistry of the composition with both calcium and magnesium can easily be tailored to address any future raw water changes.

Example #2

Solar plants require treated water containing minimal levels of impurities for cooling towers and to clean solar panel mirrors. A solar plant in the western US treats up to 4,000 gpm (15,2 m³/min) of ground water and recirculated water from the plant's processes that require treatment to reduce hardness, silica, and other contaminants. The incoming water contains a total hardness of approximately 500 ppm, silica levels of approximately 40 ppm, and a pH of 8.2. During a first period of time, the water is treated for hardness removal and pH adjustment using a yearly average of 235 ppm by weight calcium hydroxide slurry, Ca(OH)₂. Magnesium sulfate (MgSO₄) is further used to precipitate silica, dosed at a yearly average of 812 ppm by weight.

In a second period of time, the plant switches the calcium hydroxide slurry and the Magnesium sulfate to the blend of the invention for water treatment. The blend has a ratio of approximately 59% calcium hydroxide and 41% magnesium hydroxide. The blend slurry used has a low solid content of 10 % solids by weight and approximately 252 ppm by weight of the Ca/Mg blend is dosed in a clarifier. Using the Ca/Mg slurry in the clarifier, the silica targets (Silica content inferior to 15 ppm after water treatment) were easily met due to the fine particle size and high reactivity of the calcium hydroxide slurry paired with the fine dolomitic hydrate. This slurry also promoted quick pH response and efficient hardness removal. The Ca/Mg slurry has successfully and completely replaced the calcium hydroxide for pH increase and water softening. It has also replaced a significant amount of magnesium sulfate (35 %) used for silica precipitation in the clarifier. All water chemistry targets are achieved and are performing similarly or better when using the Ca/Mg slurry.

The Ca/Mg blend did not completely replace the magnesium sulfate at this site due to the substantial requirement of magnesium needed to precipitate the high concentrations of silica.

The Ca/Mg slurry has a ratio of calcium hydroxide to magnesium hydroxide targeted to quickly raise the pH in the clarifier for water softening. Once this chemical demand is fulfilled, the magnesium hydroxide demand is then evaluated. Thus, the final percentage of calcium hydroxide is dominant and drives the pH increase. The pH is the driving factor in dosing rates, leaving the magnesium ratio incomplete without supplemental magnesium through magnesium sulfate.

The solar plant received significant cost savings using the Ca/Mg blend and partially replacing the magnesium sulfate. The successful partial replacement of magnesium sulfate demonstrates that the magnesium hydroxide present in the Ca/Mg blend is able to efficiently precipitate silica.

The figure 3 shows the silica concentrations in the clarifier outlet after treatment with both calcium hydroxide and MgSO_4 during a period of 10 months and a Ca/Mg slurry with significant reduction in MgSO_4 after the period of 10 months. The key performance indicator is a concentration of silica inferior to 15 ppm.

The figure 4 shows the pH of the clarifier outlet after treatment with both calcium hydroxide and MgSO_4 , during a period of 10 months and with a Ca/Mg slurry with significant reduction in MgSO_4 after the period of 10 months. The key performance indicator is 10.4 – 11.0.

An invention has been provided with several advantages. The combined slurry product of the invention provides a single product for simultaneous control of hardness and silica in boiler feed water meeting the abovementioned requirements as well as offering the following additional advantages:

- Minimum number and volume of chemical agents to be inventoried and handled, and preferably a single storage stable product;

- Rapid process to match intake of make-up water;
- Production of easily settleable or filterable flocs;
- Able to be installed in-line with a small spatial footprint and energy demand;
- pH compatible with other components and processes or discharge regulation.

The invention allows achievement of water treatment targets using one single product that has a stable and pumpable viscosity over greater than a one month period of storage; it contains magnesium hydroxide, which targets silica removal, and calcium hydroxide, which rapidly increases pH and promotes water softening. The amount of magnesium in the ultimate slurry blends of the invention is sufficient to encompass fluctuations of naturally occurring silica and magnesium components in the raw water. The invention thus improves technical performance, eliminates handling of multiple products, and reduces overall treatment costs. In addition, this combined product provides odor control, as the readily available calcium hydroxide quickly neutralizes the source and the magnesium hydroxide provides continuous treatment. Lastly, the product is a source of alkalinity, as both the calcium and magnesium source provides alkalinity for water treatment.

While the invention has been shown in several of its forms, it is not thus limited but is susceptible to various changes and modifications without departing from the spirit thereof.

CLAIMS

1. A slurry for removing silica from water, the slurry comprising:

- hydrated lime particles;
- magnesium containing particles, the magnesium containing particles being selected from among the group consisting of at least partially hydrated dolime particles, magnesium hydroxide particles and magnesium oxide particles or a combination thereof;
- a source of water to form a slurry; and

wherein the resulting slurry is further characterized as having a solid content in the range from about 25% to about 60% by weight in the slurry.

2. The slurry of Claim 1, wherein the percentage of calcium to magnesium expressed as a percentage of calcium hydroxide to magnesium hydroxide in the combined slurry is in a range from 66-99% $\text{Ca}(\text{OH})_2$ to 1-44% $\text{Mg}(\text{OH})_2$ by dry weight.

3. The slurry of Claim 2, wherein the hydrated lime has an available lime content of at least 80% in weight of the hydrated lime measured according to the ASTM C25 or EN 459-2:2010.

4. The slurry of Claim 3, , and wherein the slurry maintains a stable and pumpable viscosity of $< 1,000 \text{ mPa}\cdot\text{s}$ for up to one month or more.

5. The slurry of Claim 4, wherein the hydrated lime particles have a d_{90} of 5 to $150 \mu\text{m}$.

6. The slurry of Claim 5, wherein the hydrated lime particles have a d_{50} of 2 to 20 μm .
7. The slurry of Claim 6, wherein the dolime, at least partially hydrated, or magnesium hydroxide or magnesium oxide particles or the combination thereof has a d_{90} comprised between 10 and 100 μm .
8. The slurry of Claim 7, wherein the d_{90} particle distribution is between 40 and 55 μm .
9. The slurry of Claim 7, wherein the dolime, at least partially hydrated, or magnesium hydroxide or magnesium oxide particles or a combination thereof has a d_{50} between 2 and 10 μm .
10. The slurry of Claim 9, wherein the d_{50} particle size distribution is between 3 and 3.5 μm .
11. The slurry of Claim 2, having a viscosity below about 1000 mPa·s.
12. The slurry of Claim 2, further comprising a dispersant notably of polycarboxylate type in an amount comprised between 0.5 and 5 wt%, based upon the total weight of the hydrated lime.
13. The slurry of Claim 12, further comprising an additive selected from the group consisting of sugars an anti-scaling agent and/or an additional dispersant compound, present in an amount of up to 2 wt% in weight of the hydrated lime.

14. A process for manufacturing a slurry useful for removing silica from water, the process comprising the steps of:

blending, in an aqueous medium, (1) hydrated lime under the form of an aqueous slurry or of a powder with (2) at least partly hydrated dolime or magnesium hydroxide or magnesium oxide particles or a combination thereof, under the form of an aqueous slurry or of a powder, and wherein the amounts of dolime, or magnesium hydroxide or magnesium oxide particles or the combination thereof are provided such as the solid content of the slurry is up to 60% by weight of the slurry.

15. The process of Claim 14, wherein the at least partially hydrated dolime, or magnesium hydroxide or magnesium oxide particles or a combination thereof are provided in amounts such that the percentage of calcium hydroxide to magnesium hydroxide is in a range comprised from about 66-99% $\text{Ca}(\text{OH})_2$ to 1-44% $\text{Mg}(\text{OH})_2$ by dry weight.

16. The process of Claim 15, wherein the hydrated lime has an available lime content of at least 80%, measured according to the standard ASTM C25 or EN 459-2:2010.

17. The process of Claim 16, wherein the said hydrated lime particles have a BET specific surface area below about 25 m^2/g , in particular below about 10 m^2/g .

18. The process of Claim 16, wherein the hydrated lime particles have a d_{90} of 5 to 150 μm .

19. The process of Claim 16, wherein the hydrated lime particles have a d_{50} of 2 to 20 μm .

20. The process of Claim 18, wherein the at least partly hydrated dolime, or magnesium hydroxide or magnesium oxide particles or a combination thereof has a d_{90} comprised between 10 to 100 μm .

21. The process of Claim 19, wherein the at least partly hydrated dolime, or magnesium hydroxide or magnesium oxide particles or a combination thereof has a d_{50} comprised between 3 and 3.5 μm .

22. The process of Claim 16, including the step of adding a dispersant notably of polycarboxylate type in an amount comprised between 0.5 and 5 wt% of the hydrated lime.

23. The process of Claim 22, further comprising the step of adding an additive selected from the group consisting of sugars, such as sucrose, an anti-scaling agent and an additional dispersant compound added in an amount of up to 2 wt% in weight of the hydrated lime.

Figure 1

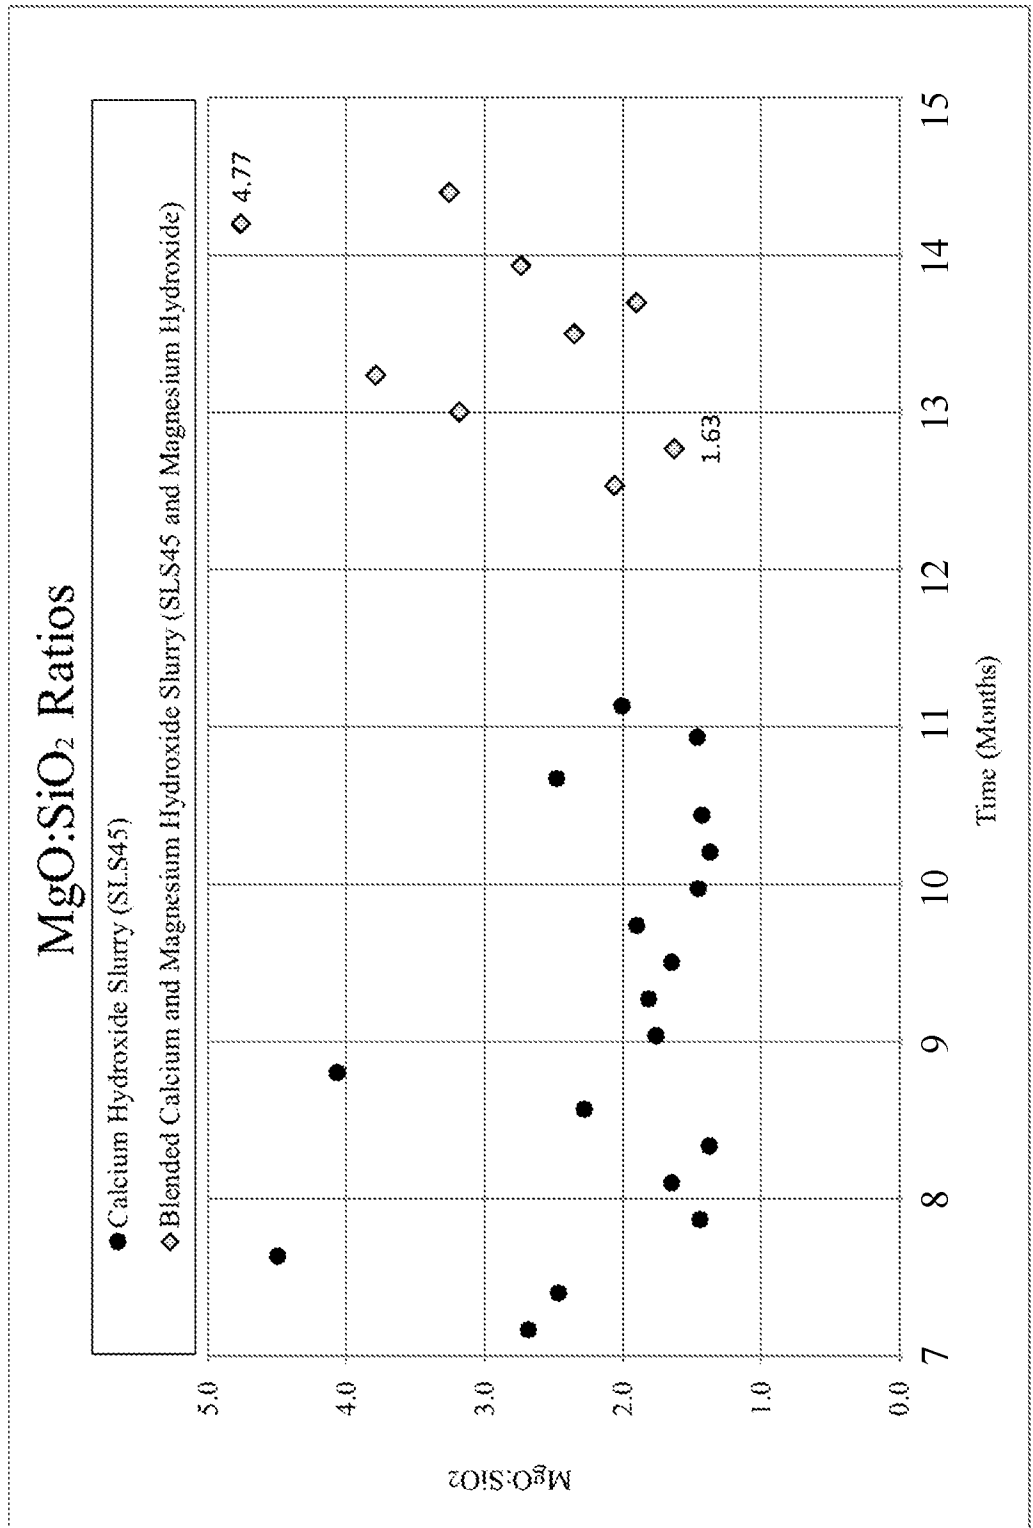


Figure 2

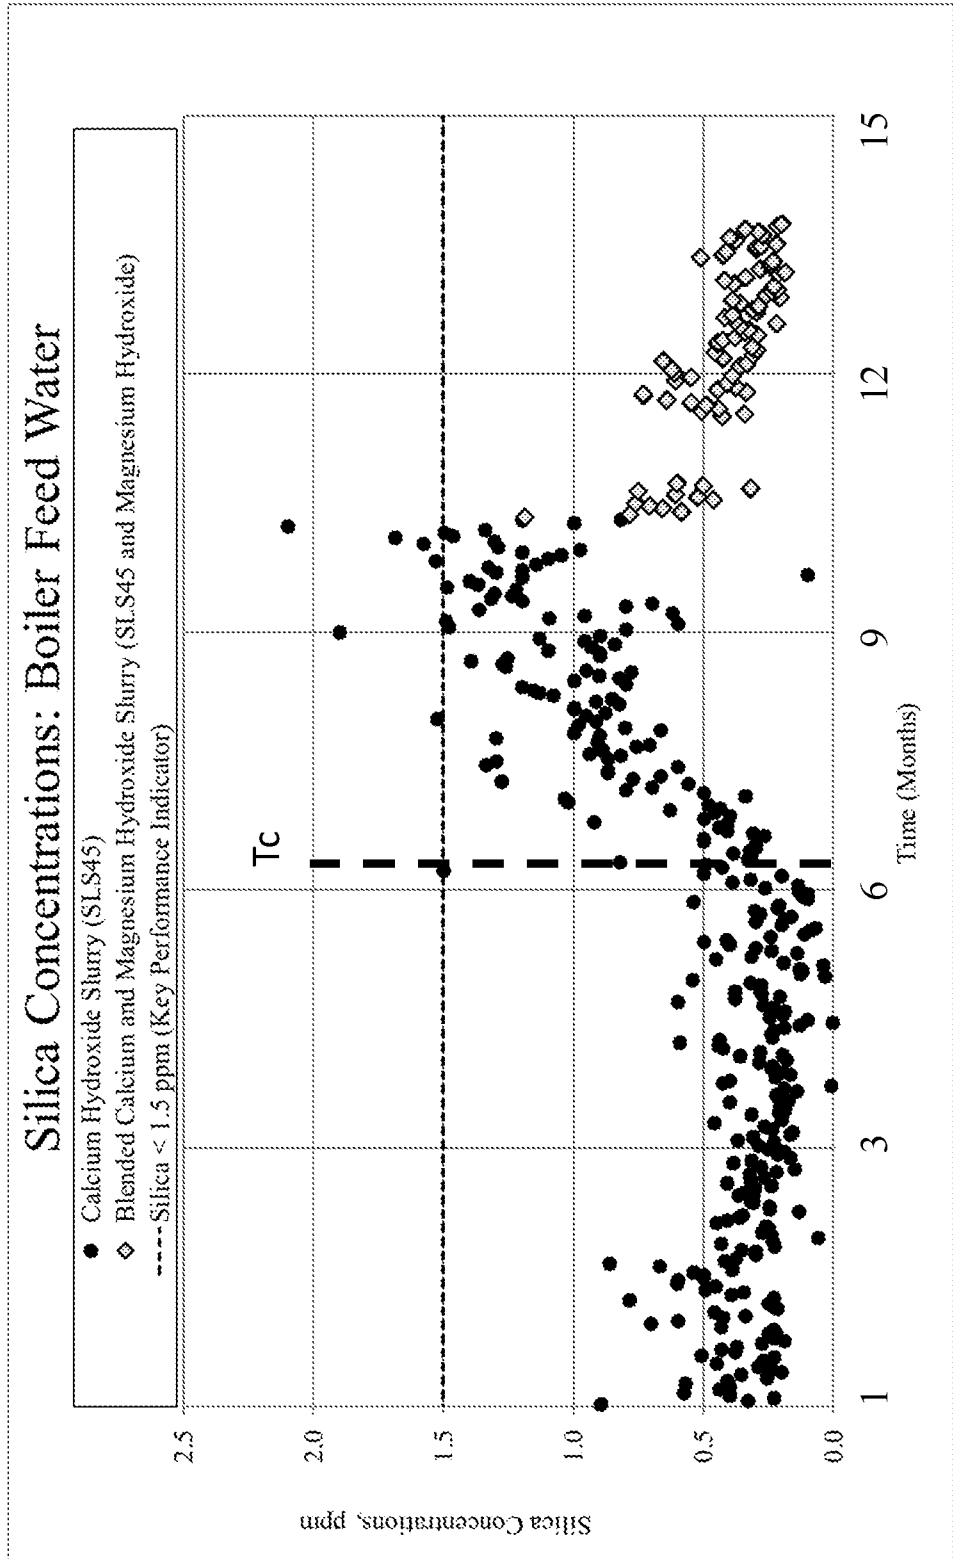


Figure 3


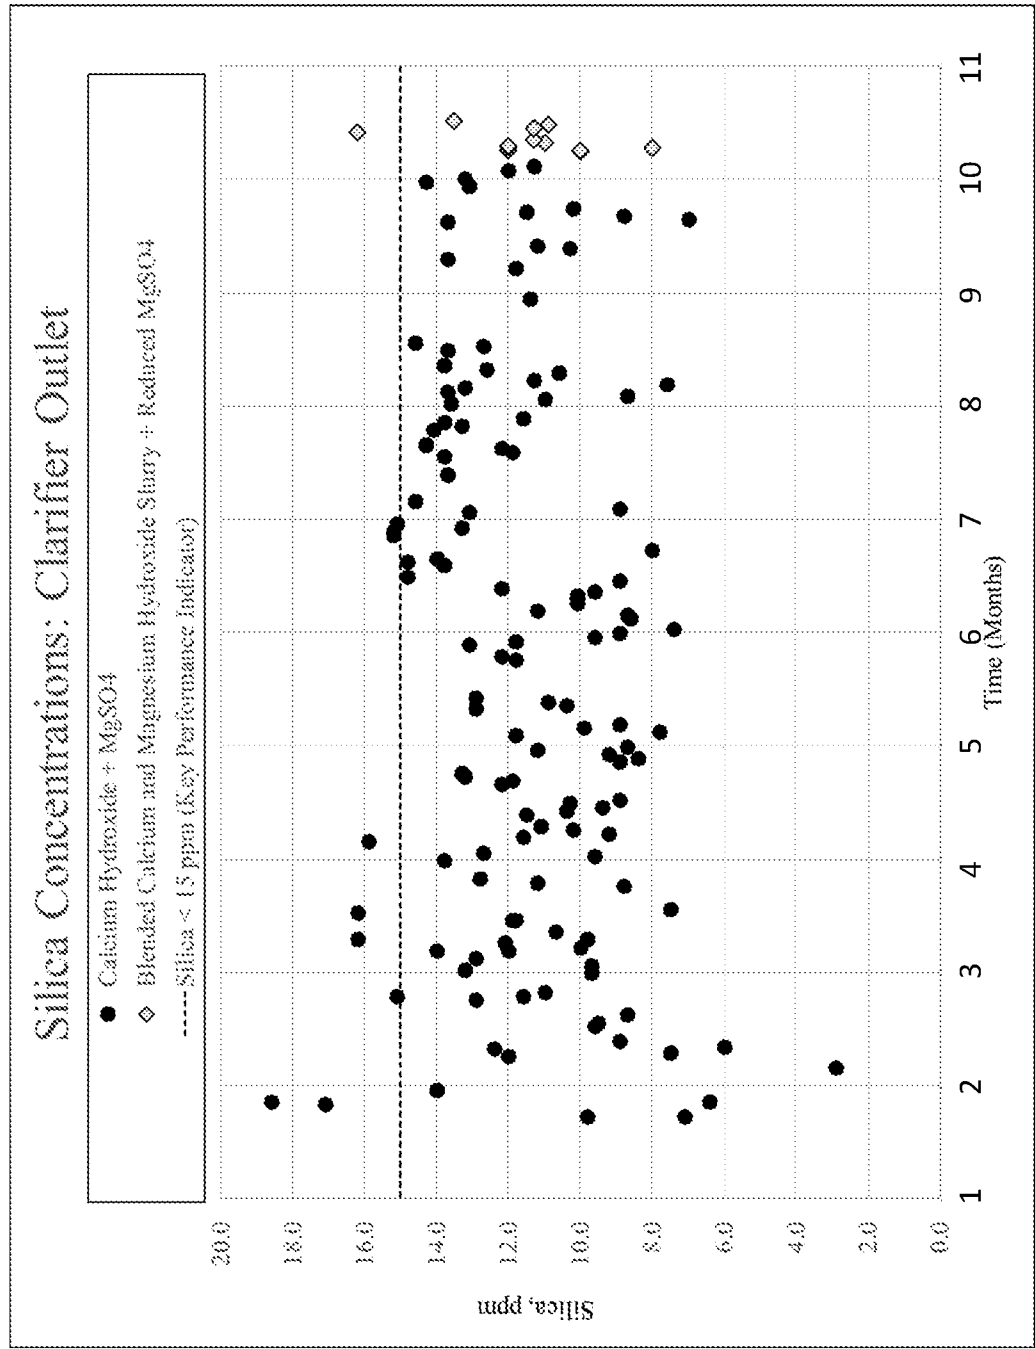


Figure 4

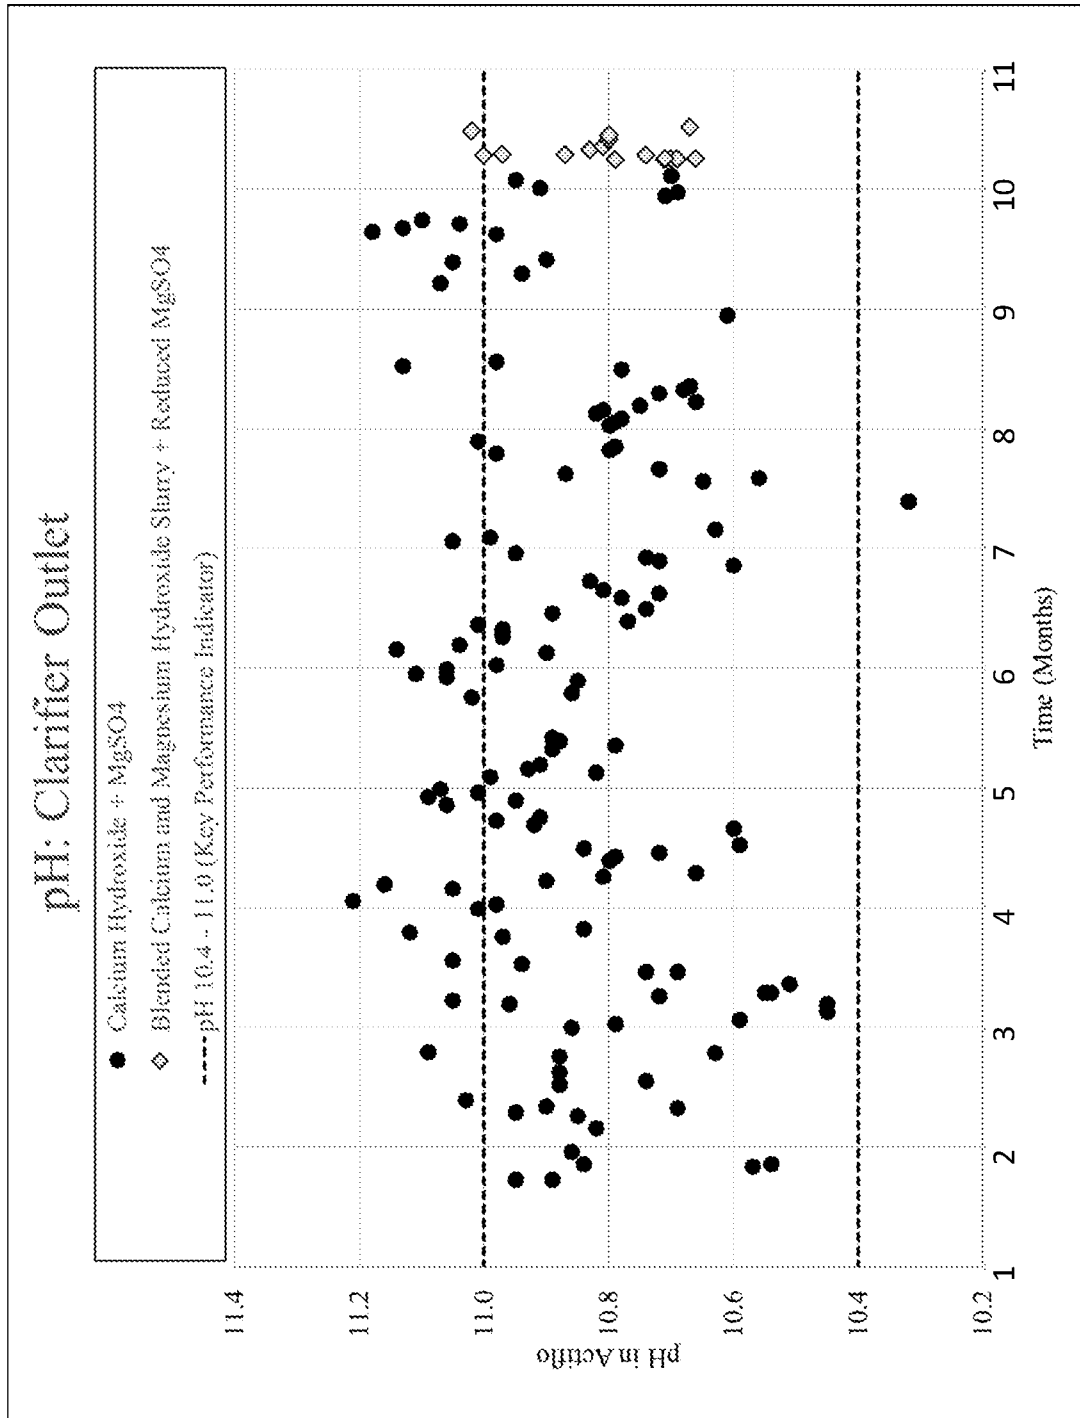

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2019/054632

A. CLASSIFICATION OF SUBJECT MATTER
 INV. B01J20/04 C02F1/28
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 B01J C02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
 EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 98/51614 A1 (MARTIN MARIETTA MAGNESIA [US]) 19 November 1998 (1998-11-19)	1,14
Y	page 12 - page 13	13,15-23
X	US 2006/275203 A1 (CHAVEZ LUIS A D [BE] ET AL) 7 December 2006 (2006-12-07)	1-12
Y	paragraph [0009] paragraph [0015] - paragraph [0019]	13,15-23

Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents :

<p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p>	<p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p>
---	---

Date of the actual completion of the international search <p align="center">3 September 2019</p>	Date of mailing of the international search report <p align="center">10/09/2019</p>
---	--

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer <p align="center">Klemps, Christian</p>
--	---

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2019/054632

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9851614	A1	19-11-1998	AU 7357598 A
			WO 9851614 A1

US 2006275203	A1	07-12-2006	AR 045092 A1
			BE 1015623 A3
			BR PI0412996 A
			CA 2533529 A1
			CN 1829662 A
			DK 1663869 T3
			EP 1663869 A2
			ES 2389903 T3
			JP 4842813 B2
			JP 2007500116 A
			MA 28006 A1
			MX PA06001196 A
			MY 145979 A
			NO 340757 B1
			PL 1663869 T3
			PT 1663869 E
			RU 2344099 C2
			SI 1663869 T1
			UA 87988 C2
			US 2006275203 A1
			WO 2005014483 A2
			ZA 200601514 B
